

**DAB Jet pump stainless steel
304 1" female thread 8bar 6,2A
230VAC green self-priming
with press control type
JETINOX 112 Control D
(7030931)**



TECHNICAL SPECIFICATIONS




Colour	green
Material	stainless steel 304
Pump body	stainless steel 304
Material impeller 1	technopolymer A
Model	self-priming with press control
Connection	female thread
Voltage	230VAC
Max. temperature	35 °C
Minimum medium temperature 0 °C (continuous)	
Press	1 "
Maximum ambient temperature 40 °C	
Suction	1 "
Type	JETINOX 112 Control D
Size	1"
Power	0.75 kW
MWC	53,8

Ampere	6,2 A
Max flow rate	3.6 m ³ /h
BEP Capacity	2.4
BEP Head	39.2
PORlh	45.1
PORhh	35.1
PORlq	1.7
PORhq	2.9

DIMENSIONS

L	424 mm
H	197 mm
LM	409 mm
Cb-1	102.5 mm
Ct-1	102.5 mm
Cr-1	89 mm
L	440 mm
W-1	174 mm
ØDi-1	1 "

ØDi-2	1 "
O	9 mm
Cb-1	144 mm
G-1	111 mm
Cl-1	122 mm
Mr	207 mm
H	197 mm

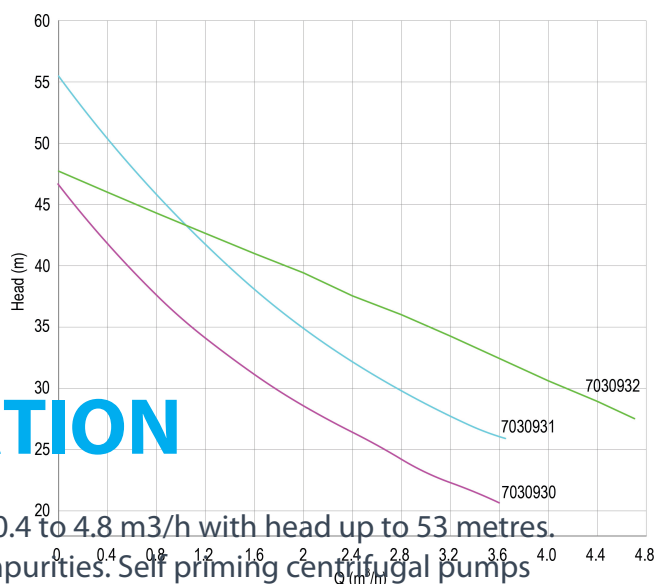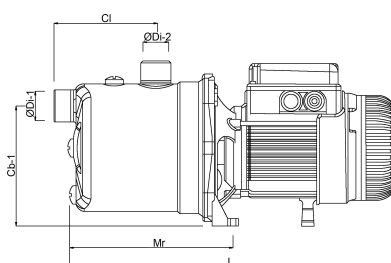

PRODUCT INFORMATION

Installation: Horizontal, Fixed. Operating range: from 0.4 to 4.8 m³/h with head up to 53 metres. Suitable for pumping water with low levels of sand impurities. Self priming centrifugal pumps with excellent suction capacity even when air bubbles are present.

Last modified date: 08/11/2025

Bosta UK Ltd.
Reflection House
Olding Road
Bury St. Edmunds
Suffolk

IP33 3TA

T +44 (0) 1284 716580

E enquiries@bosta.co.uk

<http://www.bosta.com>



bosta
bringing water to life