

**DAB Submersible pump
reinforced plastic 1" male
thread 1,5A 230VAC green
type Nova UP 300 M-A with
float switch (7030943)**



TECHNICAL SPECIFICATIONS

Colour green

Material reinforced plastic

Pump body technopolymer

Material impeller 1 technopolymer

Connection male thread

Voltage 230VAC

Max. temperature 35 °C

Minimum medium temperature 0 °C
(continuous)

Press 1 "

Maximum ambient temperature 40 °C

Minimum ambient temperature 0 °C

Type Nova UP 300 M-A

Output Power 0,3 HP

Size 1"

Float included

Power 0.21 kW

MWC 7,6

Ampere 1,5 A

Max flow rate 7.5 m³/h

BEP Capacity 8.04

BEP Head 3.83

PORlh 4.83

PORhh 3.15

PORlq 5.628

PORhq 9.648


DIMENSIONS

Db 160 mm

H-1 75.9 mm

H-2 295.3 mm

ØDi-1 1 "

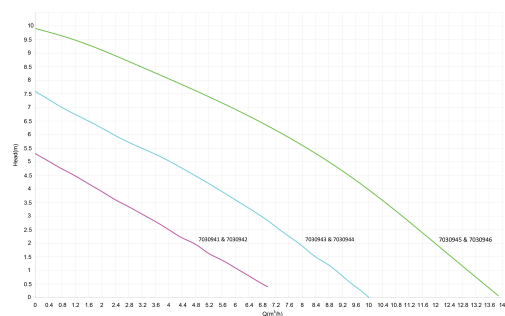

PRODUCT INFORMATION

Installation: vertical, fixed or portable. Max. immersion depth: 7 metres.

Pump can be used with liquids containing solid particles of up to 10 mm in size.

Suited for narrow well installation requiring automatic suction up to 2/3 mm. Filter is removable.

Dry operation of max. 1 minute.

Last modified date: 24/02/2026

Bosta UK Ltd.

Reflection House

Olding Road

Bury St. Edmunds

Suffolk

IP33 3TA

T +44 (0) 1284 716580

E enquiries@bosta.co.uk

<http://www.bosta.com>