

**Hayward Pool pump PP GF 63  
mm glue socket 5,72/3,3A  
400VAC black type RS II 30203  
2HP (7017119)**



**HAYWARD®**

# TECHNICAL SPECIFICATIONS



Colour	black
Pump body	PP GF
Material impeller 1	noryl
Material seal	stainless steel 304
Connection	glue socket
Max. temperature	35 °C
Width	234 mm
Height	305 mm
Frequency	50 Hz
IP value	IP55
Type	RS II 30203
Capacity	23,7 m <sup>3</sup> /h
Output Power	2 HP
Size	63 mm
Length	600 mm
Voltage	400VAC
Weight	17 kg

Power 1.5 kW

Ampere 5,72/3,3 A

BEP Capacity 20.475

BEP Head 14.5

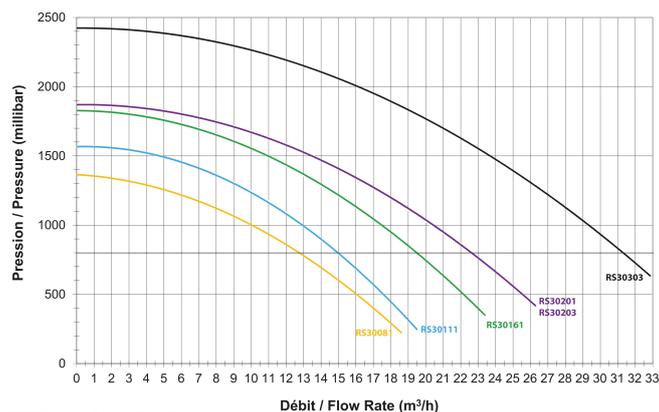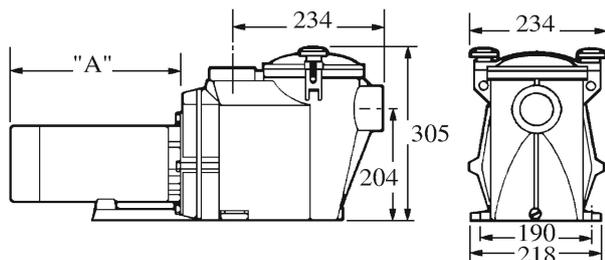

## PRODUCT INFORMATION

Quiet, yet heavy-duty, the Hayward RS II pool pump delivers optimum filtration control and less need for cleaning thanks to the spacious filter-basket. The highly-efficient, German motor ensures smooth running and a reliable lifetime.

Features:

- Union connection: Glue socket 63 mm
- Salt water resistant to 0.4% (4gr/ltr)
- Exclusive by Bevo/Bosta
- 180 degrees rotatable box for convenient access
- Suitable for pools up to 100m<sup>3</sup>

**Last modified date: 22/02/2026**

Bosta UK Ltd.  
Reflection House  
Olding Road  
Bury St. Edmunds  
Suffolk  
IP33 3TA  
T +44 (0) 1284 716580  
E [enquiries@bosta.co.uk](mailto:enquiries@bosta.co.uk)  
<http://www.bosta.com>