

**Grundfos Multi-stage
centrifugal pump stainless
steel 1 1/4" 1,44A 400VAC type
CRI 1-8 A CA I V HQQV
(7039657)**



GRUNDFOS 

TECHNICAL SPECIFICATIONS

Material	stainless steel
Shaft	stainless steel 316
Pump body	stainless steel 316
Material impeller 1	stainless steel 304
Voltage	400VAC
Temperature range	-20°C - 90°C
Maximum ambient temperature 40 °C	
Minimum ambient temperature 0 °C	
Type	CRI 1-8 A CA I V HQQV
Output Power	0.75 HP
Size	1 1/4"
Power	0.55 kW
Impellers	8
MWC	50
Ampere	1,44 A
Max flow rate	2.4 m ³ /h
Suction	1 1/4 "

Efficiency 77,8 %

Motor RPM 2770

DIMENSIONS

L 162 mm

H-1 538 mm



W-1 210 mm

ØDi-1 35 mm

ØDi-2 35 mm

Cb-1 50 mm

Cb-2 50 mm

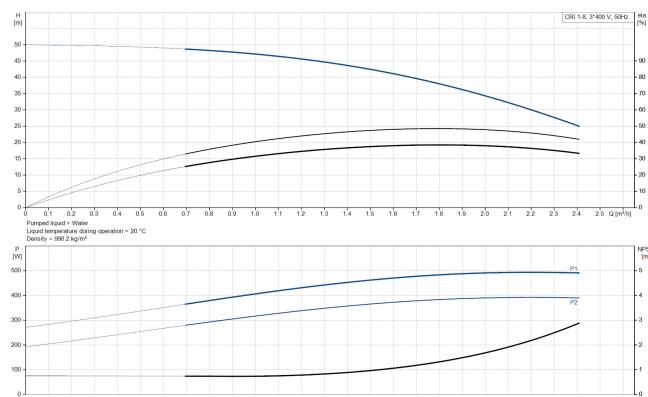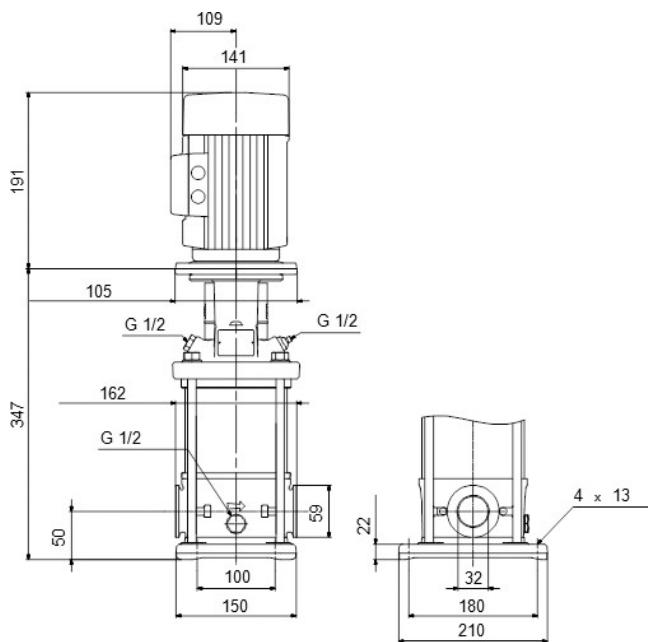

PRODUCT INFORMATION

Grundfos CRI pumps are vertical, non-self-priming, multistage, in-line, centrifugal pumps for installation in pipe systems and mounting on a foundation, suitable for industrial applications. This design provides a more compact pump design and pipework. CR pumps are designed for a variety of applications ranging from the pumping of potable water to the pumping of chemicals. The pumps are therefore suitable for a wide range of pumping systems where the performance and material of the pump meet specific demands.

Last modified date: 10/02/2026

Bosta UK Ltd.
Reflection House
Olding Road
Bury St. Edmunds
Suffolk
IP33 3TA
T +44 (0) 1284 716580
E enquiries@bosta.co.uk
<http://www.bosta.com>