

**Submersible borehole pump 1
1/2" female thread 11,9A
230VAC with 20m cable type
SDM 3/23 with capacitor - oil
cooling (7031117)**



TECHNICAL SPECIFICATIONS

Pump body	stainless steel 304
-----------	---------------------

Material impeller 1	noryl
---------------------	-------

Model	with 20m cable
-------	----------------

Connection	female thread
------------	---------------

Type	with capacitor - oil cooling
------	------------------------------

Voltage	230VAC
---------	--------

Max. temperature	35 °C
------------------	-------

Outer ø	90 mm
---------	-------

Max flow rate	6 m ³ /h
---------------	---------------------

Press	1,5 "
-------	-------

Maximum ambient temperature 35 °C	
-----------------------------------	--

BEP Capacity	4.8
--------------	-----

IP value	IP68
----------	------

Type	SDM 3/23
------	----------

Output Power	2,4 HP
--------------	--------

Size	1 1/2"
------	--------

Weight	23 kg
--------	-------

Power 1.8 kW

Impellers 23

MWC 130

Height 1670 mm

Ampere 11,9 A

BEP Head 62.5

PORlh 101

PORhh 24

PORlq 3.36



PORhq 5.76

DIMENSIONS

ØDi-1 1 1/2 "

H-1 1670 mm

Db 90 mm

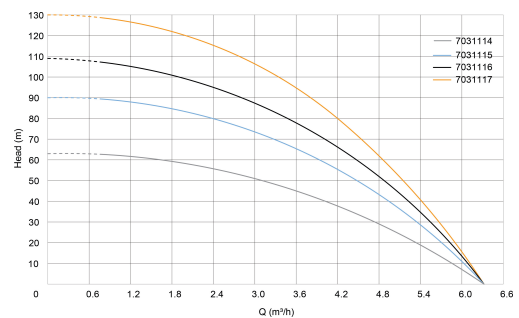

bosta
bringing water to life

PRODUCT INFORMATION

Submersible borehole pump kit with built-in capacitor.

Increased resistance to sand.

Maximum amount of sand: 300 g/m³.

Installation: Fixed in vertical position.

20 mtr cable, DIN plug without control box

Last modified date: 10/02/2026

Bosta UK Ltd.

Reflection House

Olding Road

Bury St. Edmunds

Suffolk

IP33 3TA

T +44 (0) 1284 716580

E enquiries@bosta.co.uk

<http://www.bosta.com>