

**DAB Multi-stage centrifugal  
pump stainless steel 304 1"  
female thread 8bar 6,5A  
230VAC green self priming  
type EUROINOX 40/80M  
(7030924)**



# TECHNICAL SPECIFICATIONS

Colour	green
Material	stainless steel 304
Material impeller 1	technopolymer
Model	self priming
Connection	female thread
Voltage	230VAC
Max. temperature	35 °C
Width	174 mm
Minimum medium temperature (continuous)	0 °C
Height	203 mm
Press	1 "
Maximum ambient temperature	40 °C
Suction	1 "
Minimum ambient temperature	0 °C
Type	EUROINOX 40/80M
Output Power	1,36 HP

Max. head	59 m
Size	1"
Length	458 mm
Weight	15.5 kg
Power	1 kW
Max flow rate	7.2 m <sup>3</sup> /h
BEP Capacity	5.4
BEP Head	34.7
Packaging dimensions L/W/H	480 x 212 x 265 mm

## DIMENSIONS



Cb-1	143 mm
Cl-1	166 mm
G-1	111 mm
H-1	203 mm
L	458 mm
Mr	241 mm
O	9 mm
W-1	174 mm

ØDi-1

1 "

ØDi-2

1 "

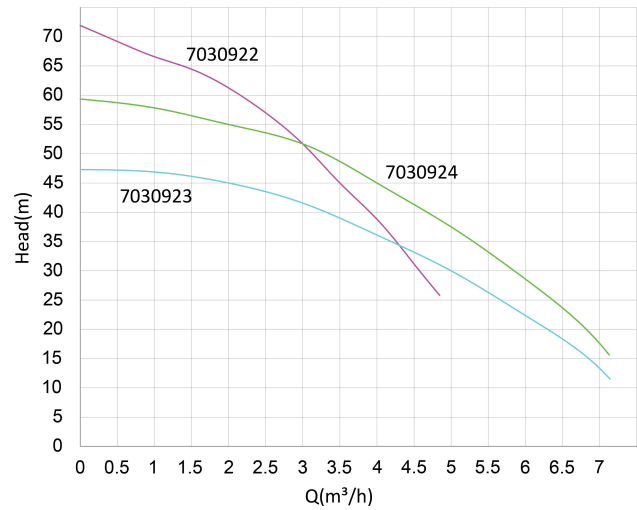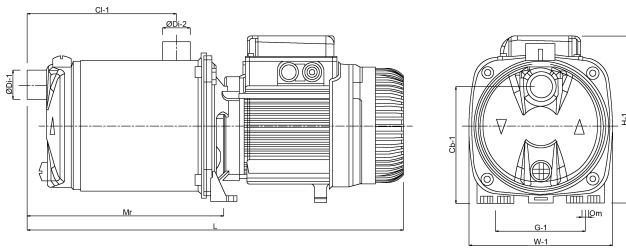

## PRODUCT INFORMATION

Installation: fixed or portable in a horizontal position.

Supplied without cable, installation should be done by a qualified electrician.

**Last modified date: 12/06/2026**

Bosta UK Ltd.  
Reflection House  
Olding Road  
Bury St. Edmunds  
Suffolk  
IP33 3TA  
T +44 (0) 1284 716580  
E [enquiries@bosta.co.uk](mailto:enquiries@bosta.co.uk)  
<http://www.bosta.com>