

DAB Jet pump cast iron 1" female thread 6bar 5,1A 230VAC green self-priming with press control type JET 102 Control D (7030929)



TECHNICAL SPECIFICATIONS

Colour green

Material cast iron

Pump body cast iron

Material impeller 1 technopolymer A

Model self-priming with press control

Connection female thread

Voltage 230VAC

Max. temperature 35 °C

Minimum medium temperature 0 °C
(continuous)

Press 1 "

Maximum ambient temperature 40 °C

Suction 1 "

Type JET 102 Control D

Size 1"

Power 0.75 kW

MWC 53,8

Ampere	5,1 A
Max flow rate	3.6 m ³ /h
BEP Capacity	2.4
BEP Head	31.8
PORlh	36.5
PORhh	29
PORlq	1.7
PORhq	2.9

DIMENSIONS



Cb-1	144 mm
Cl-1	108 mm
G-1	111 mm
H	203 mm
H	203 mm
L	414 mm
L	430 mm
Mr	197 mm
O	9 mm

W 178 mm

W-1 178 mm

ØDi-1 1 "

ØDi-2 1 "

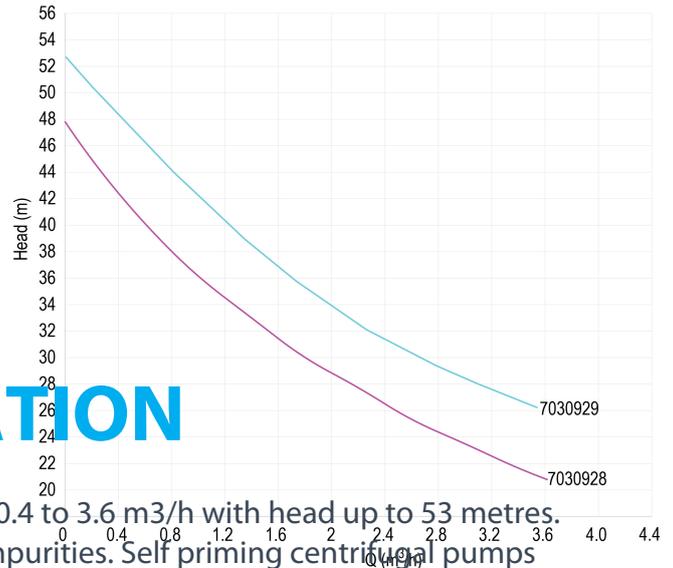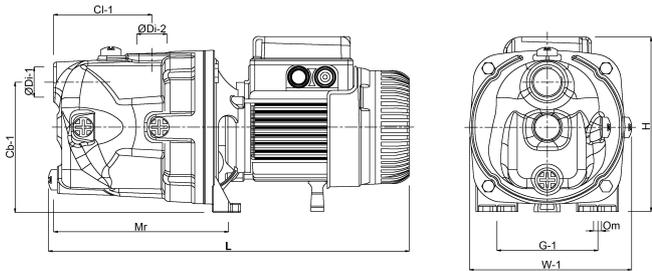

PRODUCT INFORMATION

Installation: Horizontal, Fixed. Operating range: from 0.4 to 3.6 m³/h with head up to 53 metres. Suitable for pumping water with low levels of sand impurities. Self priming centrifugal pumps with excellent suction capacity even when air bubbles are present.

Last modified date: 24/02/2026

Bosta UK Ltd.
Reflection House
Olding Road
Bury St. Edmunds
Suffolk
IP33 3TA
T +44 (0) 1284 716580
E enquiries@bosta.co.uk
<http://www.bosta.com>