

The image shows a large, blue, spherical pool filter with a black motor and a pressure gauge on top. The filter has a label that reads "PENTAIR TRITON NEO CLEARPRO TECHNOLOGY". The label also includes a table of specifications:

Filter Size	Flow Rate (GPM)	Flow Rate (LPM)	Flow Rate (m³/h)	Flow Rate (m³/d)
150	400	15.1	3.6	86.4
200	500	18.8	4.5	108.0
250	600	22.7	5.4	129.6
300	700	26.6	6.3	151.2

MAX 3.5 BAR

www.pentairpoolcare.com



TECHNISCHE SPECIFICATIES

Kleur	blauw
Materiaal	glasvezel versterkt polyester
Verbinding	binnendraad
Werkdruk	3,5 bar
Max. temp.	50 °C
Type	F-36S8-NEOCPPRO
Maat	2"
Diameter	914 mm
Gewicht	37.5 kg
Zand	420 kg
Filteropp.	0.64 m ²
Max capaciteit	32 m ³ /h
Max. vol. zwembad	160 m ³

AFMETINGEN


A	1160 mm
B	36 inch

B 610 mm

C 1253 mm

D 565 mm

E 338 mm

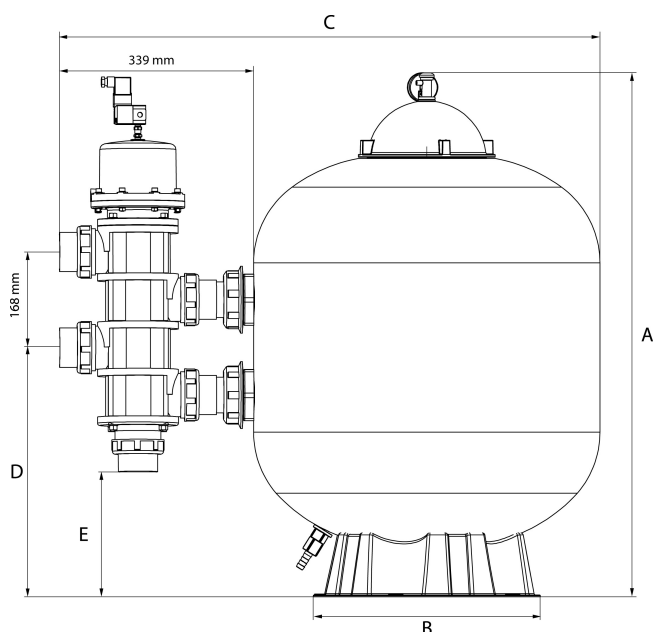

PRODUCTINFORMATIE

Glasvezel versterkte polyester tank uit één stuk vervaardigd met UV-bestendige coating
zandfilter met Pro Valve. De Pentair Pro Valve stelt externe regelsystemen zoals IntelliPool™ in
staat om automatische terugspoelingen van het filter uit te voeren. Garantietermijn: Tank 10
jaar

Gegenereerd op datum: 23-02-2026

<http://www.bosta.com>